




### GENERAL INFORMATION

- Enclosure:.....Black anodized aluminum frame
- Size:.....6-7/8"h x 12-1/4"w x 2-1/2"d, surface mount
- Weight:.....3.9 lbs
- Visibility: .....Up to 250 feet
- Character Height:..... 4" Hour and minutes
- Operating mode:.....12 or 24 hour time selectable from the switch on the clock
- Display: .....7 segment LED; a colon separates hours and minutes
- Time Accuracy:.....±1 second per year
- Operating Temperature: .....32° -122° F (0° -50° C)
- Operating Humidity: .....0 to 95% non-condensing
- Line Voltage:.....Part number dependent; see below for reference
- Current:.....4" 4-digit 120vac - 72mA (max), 61mA (avg)  
4" 4-digit 24vac - 360mA (max), 304mA (avg)
- Warranty: .....One Year
- Battery Backup:.....Capacitive backup (no batteries required). Keeps time for up to one hour during power outages.
- System Compatibility:.....Non-corrective

### ORDER INFORMATION

Part #	Description
Surface Mount	
<b>AL-60452</b>	120vac, 4", 4-digit digital system clock with Molex connector
Call	24vac, 4", 4-digit digital system clock with Molex connector
Call	120vac, 4", 4-digit digital system clock with 3 prong plug

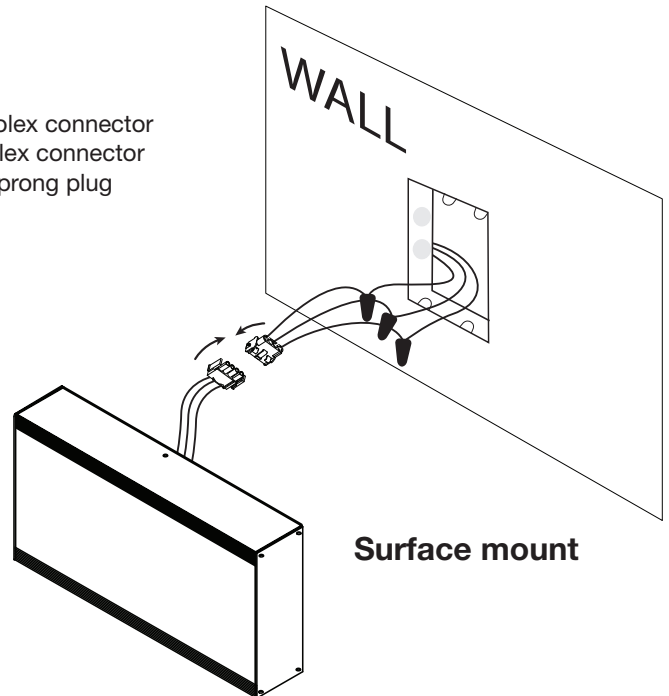

We continually strive to improve our products to meet our customers' needs and to provide the best possible value. The above specifications are believed to be correct, are subject to change without notice and may otherwise vary from the above. Please call if you need verification of any specifications or the suitability of a particular product for a particular application.