



Features	Applications	Options
----------	--------------	---------

- Sealed precision bearing swivel and wheel provide quiet, effortless mobility
- Soft (65A), non-marking MonoTech wheels reject debris and are excellent on both carpet and hard floors
- Strong protective body conceals components for easy cleaning
- Integrated thread guards protect wheels from entangling debris
- RoHS compliant

- Medical Carts
- Monitoring Equipment Stands
- IV Poles
- Computer Carts
- Laboratory Equipment
- Audio/Video Carts
- Electronic Equipment
- Seating

Integrated Tread Brake:
Available on all models. To order add [B] at the end of Part Number.

Central Locking Total Lock Brake available by special order; contact factory for details.

Custom Colors available by special order; contact factory for minimums.

Additional Fastenings:
Does your application require a metric or special fastening? Please contact us for minimums and availability.

Finish Selection

AL-76076
or
AL-76481



White

AL-76078
or
AL-76483




Grey


AL-76077
or
AL-76482



Black

Clean ♦ Quiet ♦ Effortless

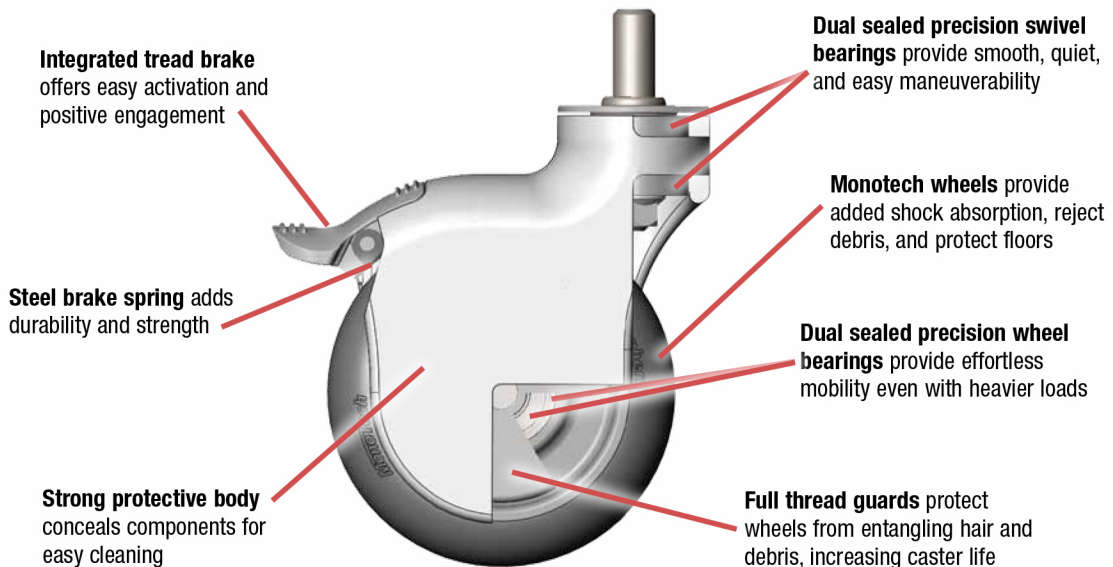


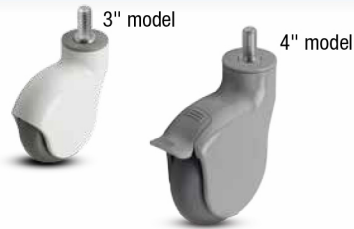


Brake Models add [B] at end of part number.

Threaded Stem Models

Wheel Dia.	Tread Width	Tread Type	Bearing Type	Finish Color	Dynamic Load	Mounting Height	Swivel Radius*	Part Number	Fastening Selection
3"	1"	MonoTech	Precision	White	110 lbs	4"	2-15/16"	AL-76076 AL-76078 AL-76077	507, 605, 637, 748 507, 605, 637, 748 507, 605, 637, 748
	1"	MonoTech	Precision	Grey	110 lbs	4"	2-15/16"		
	1"	MonoTech	Precision	Black	110 lbs	4"	2-15/16"		
4"	1-1/4"	MonoTech	Precision	White	225 lbs	5-3/8"	3-3/4"	AL-76481 AL-76482 AL-76483	741, 748 741, 748 741, 748
	1-1/4"	MonoTech	Precision	Grey	225 lbs	5-3/8"	3-3/4"		
	1-1/4"	MonoTech	Precision	Black	225 lbs	5-3/8"	3-3/4"		

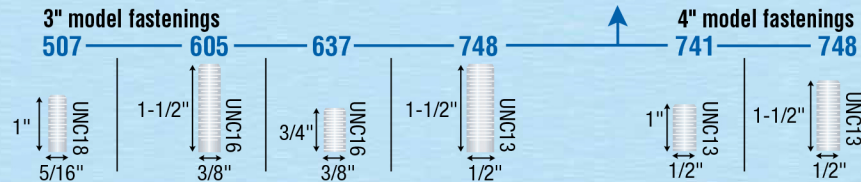


* Brake model swivel radius:
3" diameter models = 3-3/4"
4" diameter models = 4-1/8"

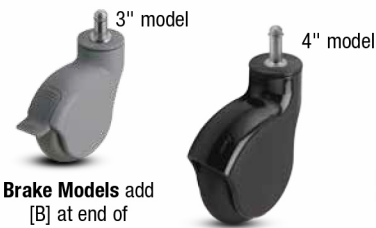

Brake Models add [B] at end of part number.

Grip Ring Stem Models

Wheel Dia.	Tread Width	Tread Type	Bearing Type	Finish Color	Dynamic Load	Mounting Height	Swivel Radius*	Part Number	Fastening Selection
3"	1"	MonoTech	Precision	White	110 lbs	4"	2-15/16"	AL-76076 AL-76078 AL-76077	223, 211 223, 211 223, 211
	1"	MonoTech	Precision	Grey	110 lbs	4"	2-15/16"		
	1"	MonoTech	Precision	Black	110 lbs	4"	2-15/16"		
4"	1-1/4"	MonoTech	Precision	White	225 lbs	5-3/8"	3-3/4"	AL-76481 AL-76482 AL-76483	291 291 291
	1-1/4"	MonoTech	Precision	Grey	225 lbs	5-3/8"	3-3/4"		
	1-1/4"	MonoTech	Precision	Black	225 lbs	5-3/8"	3-3/4"		

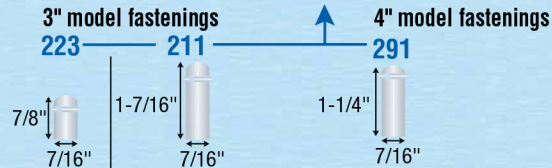


* Brake model swivel radius:
3" diameter models = 3-3/4"
4" diameter models = 4-1/8"



Brake Models add [B] at end of part number.

Swivel Top Plate Models

Wheel Dia.	Tread Width	Tread Type	Bearing Type	Finish Color	Dynamic Load	Mounting Height	Swivel Radius*	Part Number	Fastening Selection
4"	1-1/4"	MonoTech	Precision	White	225 lbs	5-5/8"	3-3/4"	AL-76481 AL-76482 AL-76483	120 120 120
	1-1/4"	MonoTech	Precision	Grey	225 lbs	5-5/8"	3-3/4"		
	1-1/4"	MonoTech	Precision	Black	225 lbs	5-5/8"	3-3/4"		



* Brake model swivel radius:
4" diameter models = 4-1/8"