


12-Outlet Foldable Power Strip with 2 Pivots, 120V, 15A, 15-ft. Cord, 5-15P, 36 in.

AL NUMBER: 82922

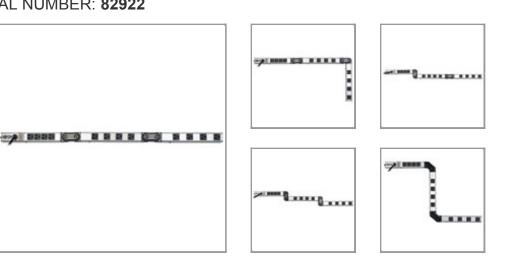

Highlights

- Foldable, dual pivot 36-in mountable housing
- 12 standard NEMA 5-15R outlets and a 15 ft. power cord
- Lighted, covered On/Off switch and 15-amp circuit breaker
- Sturdy construction and heavy-duty, all-metal housing

Applications

• Offers vertical or horizontal multi-outlet power distribution in rack enclosures, raceways, desktops and other environments where a foldable power strip is needed

Package Includes

- AL-82922
- Mounting hardware
- Instruction manual

The AL-82922 provides a 15-amp, 120v power strip with 12 standard NEMA 5-15 outlets in a rugged, all-metal, mountable housing that folds in the middle. It allows for both vertical and horizontal mounting with additional mounting clips to ensure the pivots stay in place. The AL-82922 is ideal for a variety of uses including office,

rack-mount, workbench, industrial and telecom applications. With a NEMA 5-15P, 15-ft. power cord, you don't have to install it next to outlets you already have; it can be mounted across the room and deliver reliable power where you need it most. With foldable dual pivots, the AL-82922 can go around corners, be used by more than 1 person, and fit in smaller spaces. A lighted and covered On/Off switch helps prevent accidental shut-offs, while a 15-amp circuit breaker guards against dangerous circuit overloads. Its sturdy all-metal extruded aluminum housing stands up to demanding network, laboratory or factory environments.

Features

Multi-Outlet, Foldable Power Distribution: Featuring 12 outlets compatible with all standard electrical equipment, the AL-82922 is an ideal solution for applications or locations that require power to many devices simultaneously. With a foldable, dual pivots, the AL-82922 can go around corners, be used by more than 1 person, and fit is smaller spaces. The 36-in. housing has separate outlet spacing for each section of strip, allowing enough room for most AC adapters and transformers.

Vertical or Horizontal Mounting: With vertical or horizontal installation, a rugged housing and plenty of outlets, the AL-82922 is ideal for point-of-sale and retail display applications as it provides reliable, consistent power service for multiple devices. The included mounting hardware allows the AL-82922 to be installed wherever reliable, multi-outlet power distribution is required. Extra mounting clips ensure the pivot stays in place.

Extra Long Power Cord: Install the AL-82922 far away from its power source and provide power distribution to previously un-powered areas with the extra long, 15-ft. power cord. The AL-82922 can be mounted in a different area, or a completely different room from where it draws AC power, putting you in control of getting reliable power service where you need it most.

Description

1/3



Premium Safety Features: The lighted On/Off switch features a translucent cover that eliminates accidental shut-offs while still allowing you to see whether the AL-82922 is operational with a glance. A built-in, 15-amp circuit breaker prevents dangerous circuit overloads that could damage equipment. The breaker immediately shuts off AC input to the AL-82922 when it detects that the equipment load is drawing too much power.

Heavy-Duty Housing: The AL-82922's rugged, all-metal housing is durably constructed making it a great solution for industrial, retail display and workbench applications.

Specifications

OUTPUT	
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(12) 5-15R
Output (Watts)	1500
Circuit Breaker (amps)	15
Outlet Spacing	1.18-in. 1st segment; 2.0-in. 2nd segment; 2.25-in. 3rd segment
20-Amp Rating	No
INPUT	
Nominal Input Voltage(s) Supported	120V AC
Recommended Electrical Service	15A 120V
Input Connection Type	Nema 5-15P
Input Plug Features	Black
Input Cord Length (ft.)	15
Input Cord Length (m)	4.572
Input Cord Gauge Type	14/3 SJT
Voltage Compatibility (VAC)	120
GFCI Plug	No
USER INTERFACE, ALERTS & CONTROLS	
Switches	Lighted 2 position switch controls power to all outlets
Locking Switch Cover	Transparent on/off switch cover prevents accidental turn-off
PHYSICAL	
Unit Dimensions (hwd / in.)	4.50 x 4.29 x 94.60
Unit Dimensions (hwd / cm)	6.0 x 12.0 x 103.91
Unit Weight (Ibs.)	1.64



Unit Weight (kg)	1.94	
Material of Construction	Aluminum	
Included Mounting Accessories	Includes mounting clips	
Receptacle Color	Black	
Color (AC Line Cord)	Black	
Form Factors Supported	Supports vertical or horizontal mounting in rack enclosures, raceways and a variety of other applications	
CERTIFICATIONS		
Certifications	UL 60950	
cUL / CSA (Canada)	Yes	
WARRANTY		
Product Warranty Period (Worldwide)	Lifetime limited warranty	









Like us on Facebook at: facebook.com/ALCOSalesServiceCo

Follow us on Twitter at: twitter.com/ALCOSales