



SOLO[®]
DIGITAL CLINICAL SCALES

SOLO[®] SCALE STANDS ALONE IN ECONOMIC CLINICAL WEIGHING

- 550 lb x 0.2 lb / 250 kg x 0.1 kg Capacity
- Weight, Height, and Body Mass Index
- 14 in W x 15 in D x 2.5 in H Platform Size
- 6 AA Batteries (included) or
Optional AC Adapter
- Inline Mechanical Height Rod



**UNMATCHED
ECONOMICAL
WEIGHING
QUALITY**



*The Name Brand Preferred
by Clinical Professionals
Around the World*



Eye-level height display for ease of use (52 in / 132 cm H)

Inline height rod measures:
30 in to 84.5 in /
76 cm to 214.5 cm

1-inch/25-mm high LCD,
clearly-visible display

Rock-solid, stable column –
aluminum white powder coated


Two wheels for quick and
easy portable transport

Rubber mat for patient
assurance and stability



Stylish Indicator

The solo® indicator features 8 simple buttons that are easily identifiable in any language.

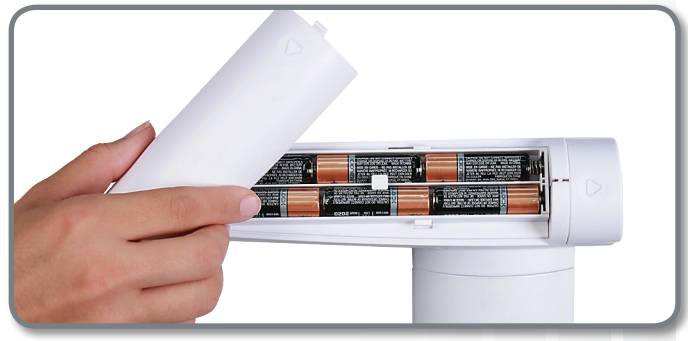

Battery Power

No power outlet available, no problem! The solo® comes with 6 AA batteries for weighing anywhere.




EMR/EHR-Ready

The scale's RS-232 serial port allows you to output measurement data to EMR/EHR software.




Body Mass Index

Simply step on the scale to weigh and the scroll arrows let you rapidly enter your height to factor BMI.

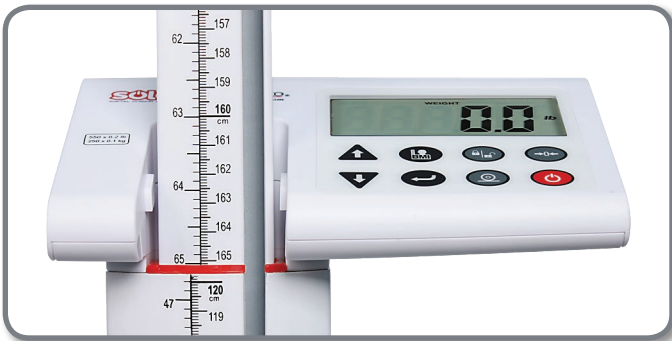

Inline Height Rod

The mechanical height rod is situated to the side of the LCD, so it never interferes with viewing measurements.

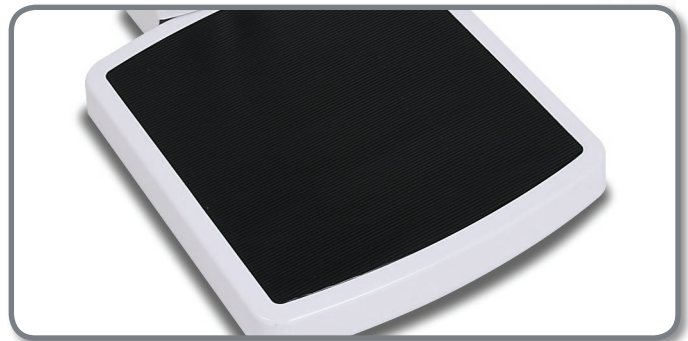

Wide, Flat Platform

The oversized 14 x 15 inch platform with rubber mat is only 2.4 inches high making it easy for patients to step on/off.



AC Adapter

The AC port is located in the base, so no pesky wires dangle from up on the indicator (AC Adapter optional: model PD-AC).



Portable, Wheels

Two integral wheels allow for ease of movement whenever you need to transport the solo®.



Model	solo
Capacity	550 lb x 0.2 lb / 250 kg x 0.1 kg
Platform Size	14 in W x 15 in D x 2.4 in H / 36 cm W x 38 cm D x 6 cm H
Weight Units	Pounds or Kilograms (selectable upon initialization at start-up; changeable through Settings menu)
Power	Six (6) AA size Alkaline batteries (included) OR an optional medical device 9V AC/DC wall plug-in adapter (Detecto part number PD-AC).
Display	Five-digit, seven-segment, 1.0-inch (25-mm) high LCD digits
Operation Temperature	50 to 104 °F / +10 to +40 °C
Function Keys	ON/OFF, PRINT, ENTER, UP ARROW, DOWN ARROW, BMI HEIGHT, LOCK/RELEASE, ZERO
Annunciators	ZERO, LOCK, STA, HOLD, LB, KG, CM, FT/IN, HEIGHT, WEIGHT, BMI, AM, PM
Scale Dimensions	14.3 in W x 19.5 in D x 52.0 in H / 36.3 cm W x 49.5 cm D x 132.1 cm H
Interface	RS-232 Serial Port, 9-Pin (DB-9), Baud Rate 9600
Height Rod	Mechanical included standard, inline
Height Rod Units	Inches or Centimeters
Height Rod Range	30 in to 84.5 in / 76 cm to 214.5 cm
Manual Input Height	2 ft 0.0 in – 7 ft 10.5 in by 0.5 in / 60.0 cm - 240.0 cm by 1cm
Minimum Weighing	11 lb / 5 kg
Wheels	(2) wheels for ease of movement
Selectable Auto Shut-Off	Up to 9 Minutes
Construction	Column and height rod – aluminum alloy white powder coated; indicator enclosure, height rod arm, platform and base – white ABS; mat – black PVC
Product Weight	17.7 lb / 7.7 kg
Shipping Weight	25 lb / 11.3 kg
Package Dimensions	30 in W x 20 in D x 11 in H / 76 cm W x 51 cm D x 28 cm H
UPC Code	809161197709



ALCO reserves the right to improve, enhance, or modify features and specifications without prior notice.

AL-83908

www.alcosales.com

6851 High Grove Blvd., Burr Ridge, IL 60527 USA
 Pb: 630-655-1900 or 800-323-4282 Fax: 800-950-1167

Mobile: 800.323.4282



ALCO[®]
Sales & Service Co.