




## 24-Outlet Vertical Power Strip, 120V, 20A, Hardwired Input, 72 in.

MODEL NUMBER: **AL-84075**

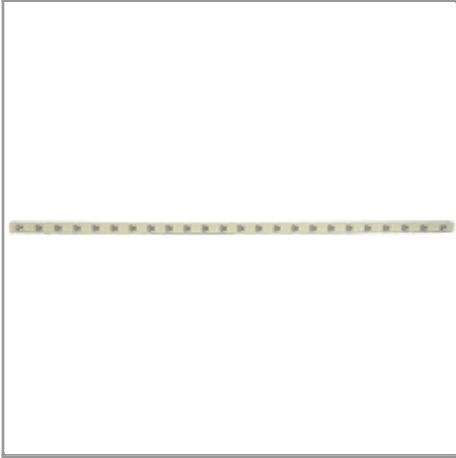

### Highlights

- AC input hardwired via knockout on unit
- 24 outlets
- Ideal for applications requiring permanent installation

### Package Includes

- 24-outlet vertical power strip
- Instruction manual

### Description

The AL-84075 Power Strip offers 20 amp multi-outlet AC power distribution in a convenient 72 inch hardwire cabinet. Includes knockout panels to accept 3/4 in. conduit fittings for hardwire installation and 24 output receptacles with 2.795 inch center-to-center spacing. Ideal for horizontal or vertical raceway style power distribution in office, workbench, industrial, networking and telecom applications.

INPUT/OUTPUT: Input: Hard-wire access via knockout panels that accept 3/4 inch conduit fittings

Output: 24 outlets total, 2 NEMA 5-15/20R (20A) and 22 NEMA 5-15R (15A)

ELECTRICAL: 120V AC, 50/60Hz, 20A (no circuit breaker)

FORMAT: 72 inch strip format with 24 outlets

### Features

- Versatile all-metal 72 inch format with outlets arranged in a single row
- Knockout panels for 3/4 inch conduit fittings allow permanent hardwire installation
- Ideal for horizontal or vertical raceway style power distribution in office, workbench, industrial, networking and telecom applications
- 24 outlets total, 2 NEMA 5-15/20R (20A) and 22 NEMA 5-15R (15A)
- 20 amp electrical capacity
- 120V AC, 50/60Hz electrical compatibility

## Specifications

OUTPUT	
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(2) 5-15/20R; (22) 5-15R
Output (Watts)	2400
Circuit Breaker (amps)	20
Outlet Spacing	2.795 in.
Right-Angle Outlets	No
INPUT	
Nominal Input Voltage(s) Supported	120V AC
Recommended Electrical Service	20A 120V
Input Connection Type	Hardwire
Input Cord Length (ft.)	0
Input Cord Length (m)	0
Voltage Compatibility (VAC)	120
PHYSICAL	
Unit Dimensions (hwd / in.)	72 x 1.5 x 1.5
Unit Dimensions (hwd / cm)	182.88 x 3.8 x 3.8
Material of Construction	Metal
Integrated Keyhole Mounting Tabs	Mount through housing supports bolt down installation to a variety of flat surfaces
Receptacle Color	Almond
Outlets Measurement (Center to Center)	101.60mm
CERTIFICATIONS	
cUL / CSA (Canada)	cUL
Approvals	UL
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

